


LED CONTOUR/POSITION LIGHT PRO 24V

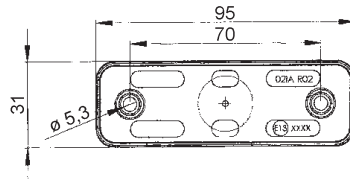

Art. No.	0812 42 451
P. Qty.	2
Lamp type	LED
Colour of light	White
Cable connection	90° HOTMELT connection
Cable length	0.5 m
Nominal voltage	24 V/DC
Power rating	0.8 W
Length	95 mm
Width	31 mm
Approval mark	ADR, ECE
IP protection class	IP 68

Related products	Art. No.
Thin-walled heat-shrink hose	0771 809 53
Bracket	0812 42 955


Universal

- Compact design
- 100% watertight thanks to cable connection using HOTMELT method

Notice

The HOTMELT method is a special process that entails thermal bonding of the cable to the lamp housing to provide a watertight seal and permanent attachment.

LED CONTOUR/TAIL LIGHT PRO 24V

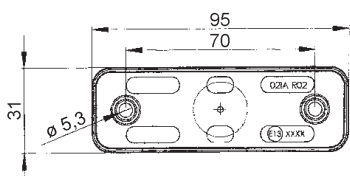

Art. No.	0812 42 450
P. Qty.	2
Lamp type	LED
Colour of light	Red
Cable connection	90° HOTMELT connection
Cable length	0.5 m
Nominal voltage	24 V/DC
Power rating	0.8 W
Length	95 mm
Width	31 mm
Approval mark	ADR, ECE
IP protection class	IP 68

Related products	Art. No.
Thin-walled heat-shrink hose	0771 809 53
Bracket	0812 42 955

Universal

- Compact design
- 100% watertight thanks to cable connection using HOTMELT method

Notice

The HOTMELT method is a special process that entails thermal bonding of the cable to the lamp housing to provide a watertight seal and permanent attachment.