


THREADED FITTING



Compatible with ORSY storage system

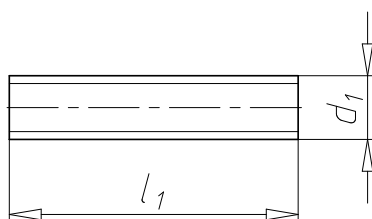

DIN 976-1 (shape A), galvanised steel 4.8, blue passivated (A2K)

Thread type x nominal diameter (d ₁)	Length (l ₁)	Art. No.	P. Qty.
M8	330 mm	0958 98 330	10
M8	350 mm	0958 98 350	1
M8	370 mm	0958 98 370	1
M8	400 mm	0958 98 400	100
M8	450 mm	0958 98 450	100
M8	500 mm	0958 98 500	100
M8	680 mm	0958 98 680	1
M8	800 mm	0958 98 800	1
M10	20 mm	0958 910 20	100
M10	25 mm	0958 910 25	100
M10	30 mm	0958 910 30	50
M10	35 mm	0958 910 35	50
M10	40 mm	0958 910 40	50
M10	45 mm	0958 910 45	50
M10	50 mm	0958 910 50	50
M10	55 mm	0958 910 55	50
M10	60 mm	0958 910 60	50
M10	70 mm	0958 910 70	25
M10	80 mm	0958 910 80	25
M10	90 mm	0958 910 90	25
M10	100 mm	0958 910 100	25
M10	110 mm	0958 910 110	25
M10	120 mm	0958 910 120	25
M10	130 mm	0958 910 130	25
M10	140 mm	0958 910 140	25
M10	150 mm	0958 910 150	25
M10	155 mm	0958 910 155	100
M10	160 mm	0958 910 160	25
M10	165 mm	0958 910 165	200
M10	170 mm	0958 910 170	25
M10	175 mm	0958 910 175	20
M10	180 mm	0958 910 180	25
M10	190 mm	0958 910 190	25
M10	200 mm	0958 910 200	25
M10	230 mm	0958 910 230	100
M10	240 mm	0958 910 240	125
M10	250 mm	0958 910 250	100
M10	270 mm	0958 910 270	50
M10	280 mm	0958 910 280	100
M10	300 mm	0958 910 300	25
M10	330 mm	0958 910 330	100
M10	340 mm	0958 910 340	100
M10	400 mm	0958 910 400	100
M10	410 mm	0958 910 410	30