


HEXAGONAL BOLT FOR HIGH-STRENGTH FITTINGS

**DIN EN 14399-4 steel 10.9,
hot-dip galvanised (TZN)**

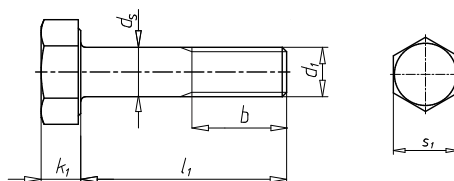

Thread type x nominal diameter (d ₁)	Length (l ₁)	Head height (k ₁)	External drive (s ₁)	Shaft diam- eter (d _s)	Thread length (metric thread) (b)	Pitch	Min./max. pack thickness	Min./max. grip length	Art. No.	P. Qty.
M27	230 mm	17 mm	WS46	27 mm	41 mm	3 mm	186-191 mm	196-201 mm	0079 427 230	1/10
M27	240 mm	17 mm	WS46	27 mm	41 mm	3 mm	196-201 mm	206-211 mm	0079 427 240	1/5
M27	250 mm	17 mm	WS46	27 mm	41 mm	3 mm	206-211 mm	216-221 mm	0079 427 250	1/5
M27	260 mm	17 mm	WS46	27 mm	41 mm	3 mm	216-221 mm	226-231 mm	0079 427 260	1/5
M30	70 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	24-29 mm	34-39 mm	0079 430 70	1/10
M30	75 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	29-34 mm	39-44 mm	0079 430 75	1/10
M30	80 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	34-39 mm	44-49 mm	0079 430 80	1/10
M30	85 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	39-44 mm	49-54 mm	0079 430 85	1/10
M30	90 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	44-49 mm	54-59 mm	0079 430 90	1/10
M30	95 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	49-54 mm	59-64 mm	0079 430 95	1/10
M30	100 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	54-59 mm	64-69 mm	0079 430 100	1/10
M30	105 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	59-64 mm	69-74 mm	0079 430 105	1/10
M30	110 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	64-69 mm	74-79 mm	0079 430 110	1/10
M30	115 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	69-74 mm	79-84 mm	0079 430 115	1/10
M30	120 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	74-79 mm	84-89 mm	0079 430 120	1/10
M30	125 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	79-84 mm	89-94 mm	0079 430 125	1/10
M30	130 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	84-89 mm	94-99 mm	0079 430 130	1/10
M30	135 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	89-94 mm	99-104 mm	0079 430 135	1/5
M30	140 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	94-99 mm	104-109 mm	0079 430 140	1/5
M30	145 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	99-104 mm	109-114 mm	0079 430 145	1/5
M30	150 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	104-109 mm	114-119 mm	0079 430 150	1/5
M30	155 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	109-114 mm	119-124 mm	0079 430 155	1/5
M30	160 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	114-119 mm	124-129 mm	0079 430 160	1/5
M30	165 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	119-124 mm	129-134 mm	0079 430 165	1/5
M30	170 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	124-129 mm	134-139 mm	0079 430 170	1/5
M30	175 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	129-134 mm	139-144 mm	0079 430 175	1/5
M30	180 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	134-139 mm	144-149 mm	0079 430 180	1/5
M30	190 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	144-149 mm	154-159 mm	0079 430 190	1/5
M30	200 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	154-159 mm	164-169 mm	0079 430 200	1/5
M30	210 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	164-169 mm	174-179 mm	0079 430 210	1/5
M30	220 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	174-179 mm	184-189 mm	0079 430 220	1/5
M30	230 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	184-189 mm	194-199 mm	0079 430 230	1/5
M30	240 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	194-199 mm	204-209 mm	0079 430 240	1/5
M30	250 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	204-209 mm	214-219 mm	0079 430 250	1/5
M30	260 mm	19 mm	WS50	30 mm	44 mm	3.5 mm	214-219 mm	224-229 mm	0079 430 260	1/5
M36	85 mm	23 mm	WS22	36 mm	52 mm	4 mm	31-36 mm	43-48 mm	0079 436 85	1/5
M36	90 mm	23 mm	WS60	36 mm	52 mm	4 mm	36-41 mm	48-53 mm	0079 436 90	1/5
M36	95 mm	23 mm	WS60	36 mm	52 mm	4 mm	41-46 mm	53-58 mm	0079 436 95	1/5
M36	100 mm	23 mm	WS60	36 mm	52 mm	4 mm	46-51 mm	58-63 mm	0079 436 100	1/5
M36	105 mm	23 mm	WS60	36 mm	52 mm	4 mm	51-56 mm	63-68 mm	0079 436 105	1/5
M36	110 mm	23 mm	WS60	36 mm	52 mm	4 mm	56-61 mm	68-73 mm	0079 436 110	1/5
M36	115 mm	23 mm	WS60	36 mm	52 mm	4 mm	61-66 mm	73-78 mm	0079 436 115	1/5