


SHEET-METAL SCREW ASSEMBLIES

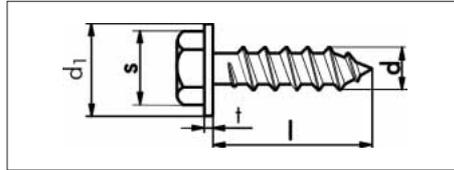

Dia. d in mm	l in mm	Art. No.	P. Qty.
4.8	13	0129 084 813	100/300
4.8	16	0129 084 816	100/300
4.8	19	0129 084 819	100/300
5.5	13	0129 085 513	100/500
5.5	16	0129 085 516	100/300
5.5	19	0129 085 519	100/300
6.3	16 (d1: 18)	0129 086 316	100/300
6.3	16 (d1: 22)	0129 086 516	100/500
6.3	20	0129 086 320	100/300
6.3	25	0129 086 325	50
6.3	28	0129 086 328	100
8.0	19	0129 088 019	100/300

Storable in ORSY® system

Nom. dia. d	in mm	4.8	5.5	6.3	8.0
s	in mm	8	8	10	13
Dims. of washer	d ₁ in mm	15	15	18/22*	21
	t in mm	1.6	1.6	1.6	2.0

* For 6.3 x 16, Art. No. 0129 65 16

ORSY 100 Assortments



DIN 7976-compliant screw (ISO 1479)
with hexagon head
Shape C, with tip,
including captive washer
Galvanized steel, blue passivated (A2K)

Contents: 890 sheet-metal screws DIN 7976, (ISO 1479), galv. steel, blue passivated (A2K) and sheet-metal screw assemblies with captive washer, galv. steel, blue passivated (A2K)

0114 48 13/19/25
0114 63 16/19/22/25/32
0114 8 19/25
0129 085 5 13/16
0129 086 3 16/20
0129 086 5 16
0129 088 0 19


Art. No. 0964 129 01

Contents: 600 sheet-metal screw assemblies with captive washer, galv. steel, blue passivated (A2K)

0129 084 8 16/19
0129 085 5 13/16
0129 086 3 16/20
0129 086 5 16
0129 088 0 19

Art. No. 0964 129 08

SHEET-METAL TAPPING SCREWS

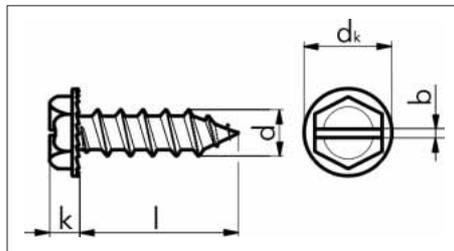

Nom. dia. d	in mm	3.5	3.9	4.2	4.8
Head dia. dk	in mm	8	8	8.5	10
Head height k	in mm	2.2	2.2	2.6	2.6
b	in mm	1.1	1.1	1.3	1.3
Drive		1/4"	1/4"	1/4"	1/4"


Nominal dia. in mm	Length l in mm	Art. No.	P. Qty.
3.5	9.5	0130 35 95	100
3.9	13	0130 39 13	100
4.2	13	0130 42 13	100/1000
4.8	13	0130 48 13	100
4.8	19	0130 48 19	100/1000

Storable in ORSY® system

Galvanized steel,
blue passivated (A2K)

- Self-tapping.
- With slotted hexagon head.
- With pressed-on washer and locking teeth.
- For metal sheets up to 1mm thick.
- No pre-drilling necessary, as the sheet-metal tapping screw lightly spot-drills the metal and pulls itself in automatically.
- Secure tightening of connection is guaranteed, as the sheet-metal tapping screw forms a rim hole in the sheet upon entry.

SCREW INSERTS

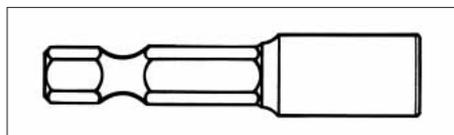

screw holder	Machine holder	Art. No.	P. Qty.
● 1/4" hex.	● 1/4" hex.	0614 176 713	1

- With magnet.