


MULTI-USE BLIND RIVET

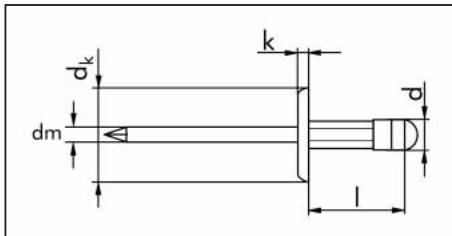

Large set head


Sleeve: Aluminum
Pin: Galvanized steel,
blue passivated (A2K)

Mid-strength riveting range

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
4.8 x 10.0	4.9-5.1	1.5 - 6.0	16.0	1.8	2.7	1,470	2,400	0915 048 10	250
4.8 x 17.0	4.9-5.1	6.5 - 12.5	16.0	1.8	2.7	1,470	2,400	0915 048 17	250
4.8 x 25.0	4.9-5.1	12.0-19.5	16.0	1.8	2.7	1,470	2,400	0915 048 25	250

Storable in ®ORSY

BLIND RIVET

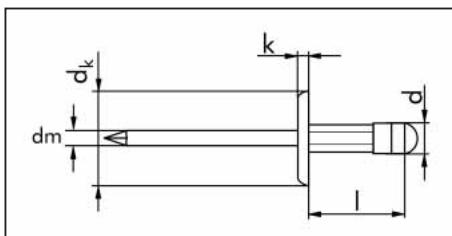


Large set head

Sleeve: Aluminum, black anodized
Pin: Galvanized steel,
blue passivated (A2K)

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
4,8 x 10,0	4.9-5.1	1.5 - 6.0	16.0	1.8	2.7	1,470	2,400	0915 948 10	250
4.8 x 17.0	4.9-5.1	6.5 - 12.5	16.0	1.8	2.7	1,470	2,400	0915 948 17	250
4.8 x 25.0	4.9-5.1	12.0-19.5	16.0	1.8	2.7	1,470	2,400	0915 948 25	250

Storable in ®ORSY

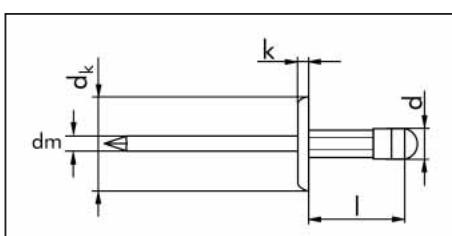

Large set head

Sleeve: Aluminum
Pin: Stainless steel A2

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d _k in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
4.8 x 10.0	4.9-5.1	1.5 - 6.0	16.0	1.8	2.7	1,470	2,400	0915 148 64	250
4.8 x 17.0	4.9-5.1	6.5 - 12.5	16.0	1.8	2.7	1,470	2,400	0915 148 127	250
4.8 x 25.0	4.9-5.1	12.0-19.5	16.0	1.8	2.7	1,470	2,400	0915 148 198	250

Storable in ®ORSY