


FILLISTER-HEAD SCREWS

DIN 7984
with low Allen head

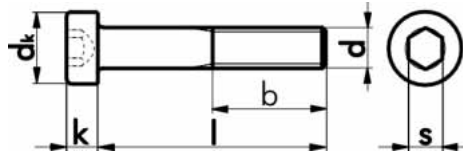

Bare 08.8 steel
Galvanized 08.8 steel, blue passivated
Bare 010.9 steel
A2
A4

Nominal diameter d	M3	M4	M5	M6	M8	M10	M12	M14	M16	M20	M24
dk in mm	5.5	7	8.5	10	13	16	18	21	24	30	36
b in mm	12	14	16	18	22	26	30	34	38	46	54
s in mm	2	2.5	3	4	5	7	8	10	12	14	17
k in mm	2	2.8	3.5	4	5	6	7	8	9	11	13

Attention: Screws may only be subjected to limited loading, cf. DIN EN ISO 898-1:2009

(This switchover concerns only a change in identification and designation of the strength class)

Attention: Depending on the type, these items are supplied with partial threading or threading nearly up to the head.

Nominal diameter d	Length l in mm	Bare 08.8 steel Art. No.	P. Qty.	08.8 steel, galv., blue passivated Art. No.	P. Qty.	Bare 010.9 steel Art. No.	P. Qty.	A2 Art. No.	P. Qty.	A4 Art. No.	P. Qty.
M3	3			0085 03 3	500						
M3	4			0085 03 4	500			0292 3 4			
M3	5	0085 3 5	1,000	0085 03 5	500	0085 73 5	500	0292 3 5	1,000		
M3	6	0085 3 6	500	0085 03 6	500	0085 73 6	1,000	0292 3 6	1,000	0297 3 6	1,000
M3	8	0085 3 8	500	0085 03 8	500	0085 73 8	500	0292 3 8	500	0297 3 8	1,000
M3	10	0085 3 10	1,000	0085 03 10	500	0085 73 10	1,000	0292 3 10	500	0297 3 10	1,000
M3	12	0085 3 12	500	0085 03 12	500	0085 73 12	1,000	0292 3 12	1,000	0297 3 12	1,000
M3	14			0085 03 14	500			0292 3 14	500	0297 3 14	100
M3	16	0085 3 16	500	0085 03 16	500			0292 3 16	1,000		
M3	18	0085 3 18	100					0292 3 18	1,000		
M3	20	0085 3 20	500	0085 03 20	500			0292 3 20	1,000	0297 3 20	1,000
M3	22	0085 3 22	500	0085 03 22	500						
M3	25	0085 3 25	500	0085 03 25	500			0292 3 25	500		
M3	30	0085 3 30	100	0085 03 30	100			0292 3 30	500		
M3	35			0085 03 35	500			0292 3 35	500		
M3	40	0085 3 40	500	0085 03 40	500			0292 3 40	500		
M3	50			0085 03 50	250						
M4	6	0085 4 6	500	0085 04 6	100	0085 74 6	500	0292 4 6	200	0297 4 6	500
M4	8	0085 4 8	100	0085 04 8	100	0085 74 8	500	0292 4 8	1,000	0297 4 8	500
M4	10	0085 4 10	100	0085 04 10	100	0085 74 10	500	0292 4 10	200	0297 4 10	500
M4	12	0085 4 12	500	0085 04 12	100	0085 74 12	500	0292 4 12	1,000	0297 4 12	500
M4	14			0085 04 14	500			0292 4 14	500	0297 4 14	500
M4	16	0085 4 16	100	0085 04 16	100	0085 74 16	500	0292 4 16	10020	0297 4 16	500
M4	18	0085 4 18	1,000	0085 04 18	1,000			0292 4 18	100		
M4	20	0085 4 20	100	0085 04 20	100	0085 74 20	500	0292 4 20	500	0297 4 20	500
M4	22	0085 4 22	100	0085 04 22	100						
M4	25	0085 4 25	500	0085 04 25	100			0292 4 25	500	0297 4 25	500
M4	30	0085 4 30	1,000	0085 04 30	100	0085 74 30	500	0292 4 30	500	0297 4 30	500
M4	35	0085 4 35	500	0085 04 35	100	0085 74 35	200	0292 4 35	500		
M4	40	0085 4 40	1,000	0085 04 40	100	0085 74 40	500	0292 4 40	500	0297 4 40	500
M4	45	0085 4 45	500	0085 04 45	500	0085 74 45	200	0292 4 45	100		
M4	50	0085 4 50	500	0085 04 50	50			0292 4 50	100		
M4	60			0085 04 60	200	0085 74 60	200				
M5	6	0085 5 6	500	0085 05 6	100			0292 5 6	500		
M5	8	0085 5 8	500	0085 05 8	100	0085 75 8	500	0292 5 8	500	0297 5 80	500
M5	10	0085 5 10	100	0085 05 10	100	0085 75 10	500	0292 5 10	200	0297 5 10	500
M5	12	0085 5 12	100	0085 05 12	100	0085 75 12	500	0292 5 12	200	0297 5 12	500
M5	14	0085 5 14	500	0085 05 14	100	0085 75 14	1,000	0292 5 14	500		
M5	16	0085 5 16	100	0085 05 16	100	0085 75 16	500	0292 5 16	200	0297 5 16	500
M5	18	0085 5 18	500	0085 05 18	500	0085 75 18	500	0292 5 18	500	0297 5 18	200
M5	20	0085 5 20	100	0085 05 20	100	0085 75 20	500	0292 5 20	200	0297 5 20	500
M5	22	0085 5 22	100	0085 05 22	500						
M5	25	0085 5 25	500	0085 05 25	100	0085 75 25	500	0292 5 25	500		
M5	30	0085 5 30	500	0085 05 30	100	0085 75 30	1,000	0292 5 30	200		
M5	35	0085 5 35	200	0085 05 35	100	0085 75 35	200	0292 5 35	500	0297 5 35	500
M5	40	0085 5 40	200	0085 05 40	200	0085 75 40	200	0292 5 40	500	0297 5 40	500
M5	45	0085 5 45	500	0085 05 45	100			0292 5 45	200	0297 5 45	500
M5	50	0085 5 50	200	0085 05 50	100			0292 5 50	200	0297 5 50	100
M5	60	0085 5 60	200					0292 5 60	200		
M5	70			0085 05 70	100						