




MBT-BLIND STUD

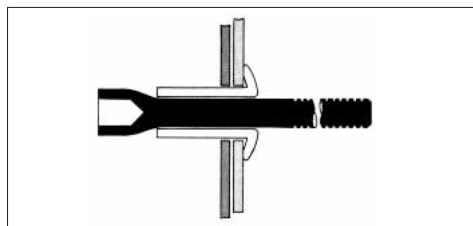


Can be stored in ORSY® system

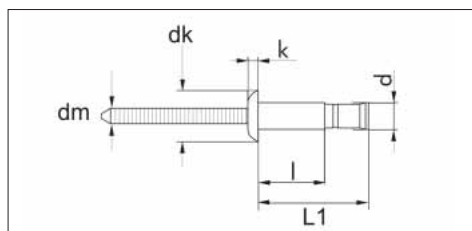


The blind stud is guided into the drilled hole.

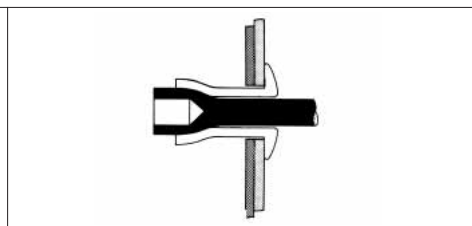

The rivet pin is pulled in and presses the connecting parts together when the installation device is actuated.

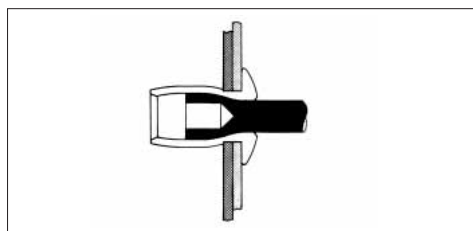

Formation of tulip-shaped closing head.

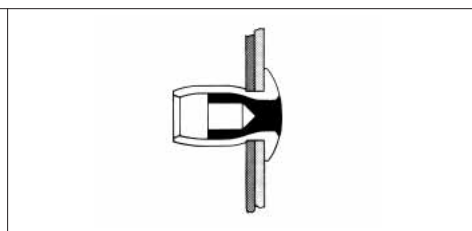

The rivet pin is mechanically locked in the rivet sleeve and torn off flush at the set head with the installation device.

Round pan head

Sleeve: Stainless steel A2

Pin: Stainless steel A2

High-strength riveting range

- Uniformly high pretension.
- Permanent locking.
- Absolutely vibration-proof.
- Excellent resistance to fatigue.
- High tensile and shear strength values enable connections for very highest loads.
- Captive rivet pin (mechanically locked).
- Safe filling of drilled hole – airtight and protected against splash water.
- Unusually large clamping length range.
- Quick installation with consistent quality thanks to use of pneumatic device.


d x l in mm	Drilling hole dia. in mm	Clamping range in mm	dm in mm	dk in mm	k in mm	L1 in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
4.8 x 10.3*	4.90 - 5.10	1.5 - 6.8	3.0	9.70	1.80	18.0	5,800	5,000	0921 480 10	250
4.8 x 13.5*	4.90 - 5.10	1.5 - 11.0	3.0	9.70	1.80	24.0	5,800	5,000	0921 480 13	250

* May only be installed with Lever Riveting Device, Art. No. 0949 800, or PNG 122, Art. No. 0703 937 33 and Mouth Piece, Art. No. 0946 830.820.

d x l in mm	Drilling hole dia. in mm	Clamping range in mm	dm in mm	dk in mm	k in mm	L1 in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
6.5 x 14.0*	6.60 - 7.00	1.0 - 9.5	4.0	13.0	2.50	24.0	11,700	10,500	0921 650 14	250
6.5 x 20.0*	6.60 - 7.00	2.0 - 16.0	4.0	13.0	2.50	33.0	11,700	10,500	0921 650 20	250

* May only be installed with Lever Riveting Device, Art. No. 0949 800, or PNG 122, Art. No. 0703 937 33 and Mouth Piece, Art. No. 0946 820.830.

Suitable installation tools

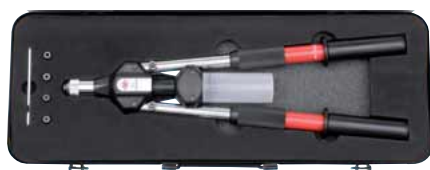

HNG 28 Lever Riveting Device

Art. No. 0949 800

P. Qty. 1



PNG 122 Pneumatic Rivet Tool

Art. No. 0703 937 33

P. Qty. 1