


PIPE AND FASTENING CLAMP MULTIFIX



Illustration only

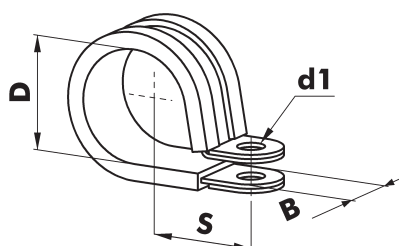

Material	Steel
Surface	Galvanised
Material of the rubber profile	EPDM
Colour of rubber profile	Black
Shore A hardness	70 +/- 5
Min./max. temperature resistance	-40 to 120 °C
Resistance against	Abrasion (good), Weather (very good), Ozone (very good), Aging (very good), Light (good), Alcohol (good), Acid (good), Lye (good)
Norms	DIN 3016

Width (B)	Nominal diameter (D)	Flange hole (d1)	Distance centre of pipe to centre of hole (S)	Art. No.	P. Qty.
12 mm	6 mm	M5	11 mm	0542 6 12	50 / 100
12 mm	8 mm	M5	12 mm	0542 8 12	50 / 100
12 mm	10 mm	M5	13 mm	0542 10 12	50 / 100
12 mm	12 mm	M5	14 mm	0542 12 12	50 / 100
12 mm	15 mm	M5	15.5 mm	0542 15 12	50
15 mm	6 mm	M6	14.2 mm	0542 6 15	50 / 100
15 mm	8 mm	M6	15.2 mm	0542 8 15	50 / 100
15 mm	10 mm	M6	16.2 mm	0542 10 15	50 / 100
15 mm	12 mm	M6	17.2 mm	0542 12 15	50 / 100
15 mm	15 mm	M6	18.7 mm	0542 15 15	50
15 mm	18 mm	M6	20.2 mm	0542 18 15	50
15 mm	20 mm	M6	21.2 mm	0542 20 15	50
15 mm	22 mm	M6	22.2 mm	0542 22 15	50
15 mm	25 mm	M6	23.7 mm	0542 25 15	50
15 mm	30 mm	M6	26.2 mm	0542 30 15	50
15 mm	35 mm	M6	28.7 mm	0542 35 15	25
20 mm	10 mm	M8	19.5 mm	0542 10 20	50
20 mm	15 mm	M8	22 mm	0542 15 20	50
20 mm	18 mm	M8	23.5 mm	0542 18 20	50
20 mm	20 mm	M8	24.5 mm	0542 20 20	50
20 mm	22 mm	M8	25.5 mm	0542 22 20	50
20 mm	25 mm	M8	27 mm	0542 25 20	25
20 mm	30 mm	M8	29.5 mm	0542 30 20	25
20 mm	35 mm	M8	32 mm	0542 35 20	25
20 mm	40 mm	M8	34.5 mm	0542 40 20	25
25 mm	20 mm	M10	27.5 mm	0542 20 25	10
25 mm	25 mm	M10	30 mm	0542 25 25	10
25 mm	38 mm	M10	36.5 mm	0542 38 25	10
25 mm	40 mm	M10	37.5 mm	0542 40 25	10
25 mm	48 mm	M10	41.5 mm	0542 48 25	10
25 mm	50 mm	M10	42.5 mm	0542 50 25	10
25 mm	55 mm	M10	45 mm	0542 55 25	10

The fastening clamp with rubber profile

Reinforced tabs

The support washers prevent the tabs from tearing under extreme mechanical stress

Rubber profile

- Vibration protection
- Protection against seepage
- Sound absorbent

Application area

For clamping and fastening pipes, cables, cable harnesses, protective pipes, hoses and other lines on engine bases, bodywork, beams, assemblies, machines etc.

