

BLIND RIVET ATTACHMENT TOOL



For attaching aluminum, steel and stainless steel blind rivets, dia. 2.4-5.0 mm.

- Fatigue-free working compared to conventional hand-held riveting pliers.
- Compatible with every commonly available chuck.
- Attaching Würth drilling rivets.


Applications:

Can be used up to a rivet sleeve length of 25 mm.

Notes:

The attachment tool is only suitable for machines with clockwise/counterclockwise running.

A battery-powered screwdriver with a voltage of 14.4 V or higher is recommended.

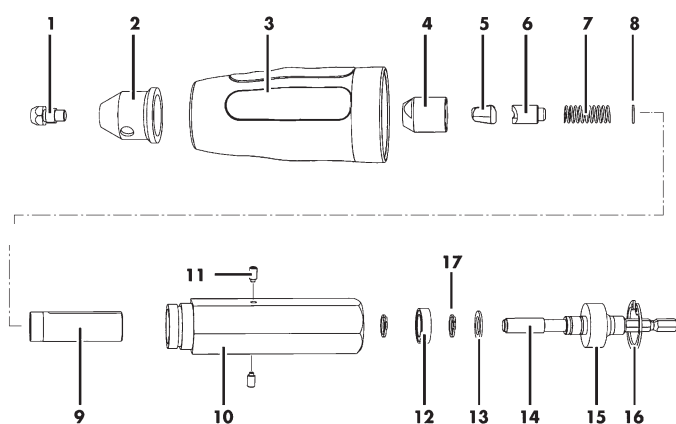

Dimensions (L x W x H in mm)	Weight in g	Art. No.	P. Qty.
185 x 50 x 50	410	0949 550	1

Scope of delivery:	Art. No.	P. Qty.
Mouthpiece, 2.4 mm dia. Hole dia. of mouthpiece: 1.7 mm	0946 20 24	1
Mouthpiece, 3.0/3.2 mm dia. Hole dia. of mouthpiece: 2.3 mm	0946 20 32	
Mouthpiece, 4.0 mm dia. Hole dia. of mouthpiece: 2.9 mm	0946 20 40	
Mouthpiece, 4.8/5.0 mm dia. Hole dia. of mouthpiece: 3.2 mm	0946 20 50	

Additional articles:			
Position	Designation	Art. No.	P. Qty.
1	Mouthpieces	see scope of delivery	1
2	Mouthpiece mounting	0706 949 618	
3	Handle	0706 949 622	
4	Jaw carrier	0706 949 614	
5	Clamping jaws	0706 949 620	
6	Clamp spreader	0706 949 612	
7	Compression spring	0706 949 610	
8	Disk	0706 949 608	
9	Inner sleeve	0706 949 606	
10	Hexagon housing	0706 949 600	
11	Stud bolt	0706 949 630	
12	Axial bearing	0706 949 602	
13	Alignment disc	0706 949 628	
14	Spindle	0706 949 604	
15	Ball bearing	0706 949 624	
16	Circlip	0706 949 626	
17	Circlip	0706 949 632	

Additional articles:

Blind Rivets

Art. No. 0936 ..., 0915 ..., 0913 ..., 0935 ..., 0914 ..., 0937 ..., 0940 ...

Zebra drilling rivet

Art. No. 0915 6..

Battery-powered screwdriver BS 12-A solid (Li-ion)

Art. No. 0700 683 2