


TORQUE TOOLS

Torque wrenches are precision tools which must be checked at regular intervals with suitable mea-

suring equipment and adjusted if necessary. We recommend an annual calibration by our

masterSERVICE®.

TORQUE WRENCH

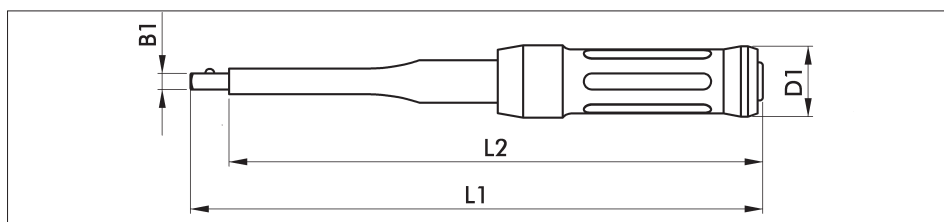

Drive	Measuring range		L ₁ mm	L ₂ mm	B ₁ mm	D ₁ mm	Art. No.	P. Qty.
	Nm	lbf.ft.						
16 mm	8 - 60	5 - 45	301	270	16	37	0714 71 30	1
16 mm	40-200	30-150	423	390	16	37	0714 71 31	1

with insertion tools

- Especially for hard-to-reach cable glands in cramped spaces.
- Tool quick-change system with locking pin guarantees flexible, fast work.
- Accuracy of $\pm 3\%$ to the set value, in accordance with DIN EN ISO 6789:2003.
- Easy and precise adjustment by turning the handle.
- Mount: dia. 16 mm.
- Scaling in both Nm and lbf.ft.
- Acoustic, tangible perception of the torque triggering prevents over-tightening of bolts.
- Anti-slip 2-component handle.
- Following use, relax the spring and set to the lowest value.
- With calibration certificate.
- Delivery in a plastic box.

INSERTION OPEN-END WRENCH



Wrench Size	Art. No.	P. Qty.
13 mm	0714 71 313	1
17 mm	0714 71 317	1
19 mm	0714 71 319	1
24 mm	0714 71 324	1
30 mm	0714 71 330	1

- For solving difficult assembly problems – easily interchangeable.
- With pin locking mechanism.
- Mount: 16 mm
- Material: 31CrV3.

INSERTION RATCHET




Drive	Art. No.	P. Qty.
3/8"	0714 71 301¹	1
1/2"	0714 71 302²	1

¹ 72 teeth

² 36 teeth

- For solving difficult assembly problems – easily interchangeable.
- Square coupler drive.
- With pin locking mechanism.
- Mount: 16 mm
- Material: 31CrV3.

ACCESSORIES



Adjustment tool

for Würth torque wrenches
Art. No. 0714 71 21-24, 0714 71 30-31

Art. No. 0714 71 70